

SC344m

- Release Date **February 2022**
- Article No. **201015**
- EAN No. **4260393850972**
- Customs Tariff No. **85 198 100**
- Product URL **<https://www.trivum.de/sc344m>**



SC344m - EN



Amplifier

- 8x30 watts sinus at 8 ohms
- Class D amplifier (digital)
- Impedance of the connected loudspeakers at least 4 ohms

Power supply

- 100V-240V AC (max. 200 watts)
- Idle power consumption (without active zone): 5 watts

Housing

- Black lacquered sheet steel
- Dimensions: 435 mm x 65 mm x 254 mm (WxHxD)
- With packaging: 530 mm x 76 mm x 350 mm (WxHxD)
- Weight (net): 3,54 kg

Connectors


- 1x Network (RJ45 socket)
- 1x USB (for service)
- 4x Speaker stereo (2x 2-pin terminal block)
- 4x Line output stereo (cinch socket)
- 4x Line input stereo (cinch socket)
- 8x Trigger input/output (3-pin terminal block)
- 1x DAB+/FM antenna (F socket)
- 2x USB-C trivum AudioBus Input (SDAT/MDAT)
- 4x USB-C trivum AudioBus Output (MDAT)
- 1x Power (IEC 60320 C5)

Network

Scope of delivery

- LAN (RJ45 Ethernet)
- 1x SC344m
- 1x Adaptor for radio antenna (F connector)
- 1x Power cord
- 2x Rack brackets for mounting in a 19" rack
- 1x Plug-in connection terminal for trigger
- 4x Plug-in connection terminal for speakers
- 1x Quick Installation Guide

The specifications mentioned here are subject to change without notice.

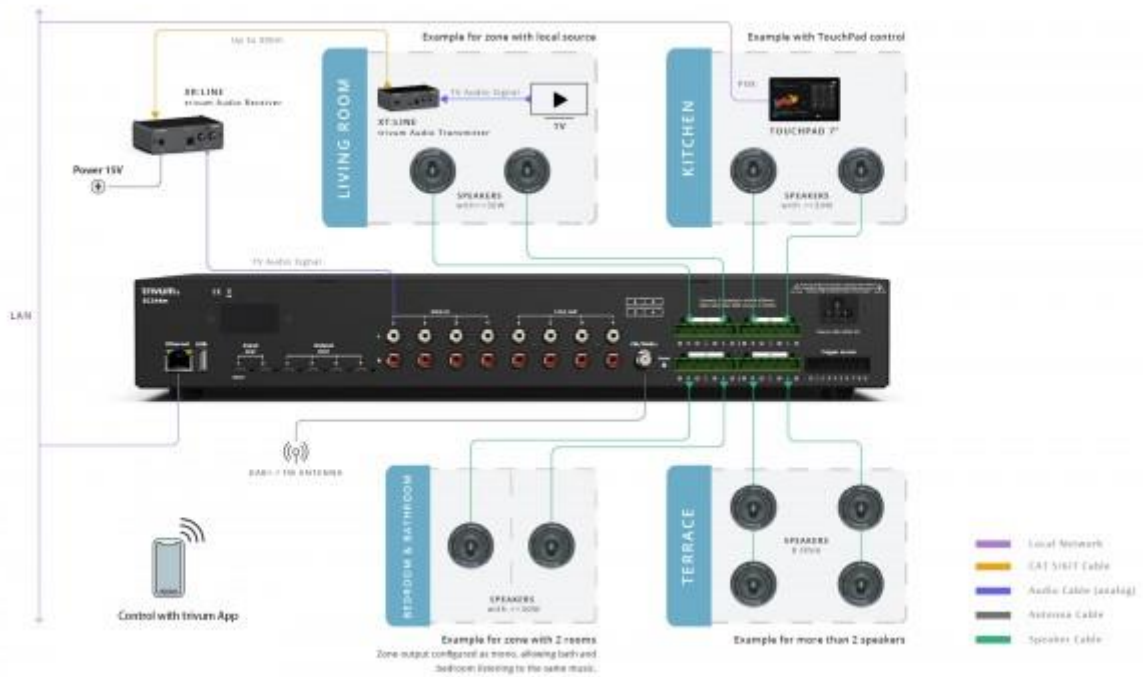

SC344m rack brackets for mounting in a 19" rack

